

24mm金属行星齿轮箱

典型应用: 眉笔、照相机、保健用品、自动浇灌设备等

Typical Application: Eyebrow pencil, Camera, Health care product, Auto watering device, and etc.

Standard Metal Geared Motor

输出功率: 约0.1W~30W

Output Power: 0.1W~30W

金属输出轴(可选5mm,6mm直径)


Metal output shaft

型号 Model	典型应用参数 Typical Application Parameters							Max Rated Torque of Gear Box 齿轮箱额定 容许力矩	Max Instant Torque of Gear Box 齿轮箱瞬间 容许力矩	Gear Ratio 减速比	Gear Box Length 减速箱长 L1	
	Rated 额定值	At No Load 空载数据		At Rated Load 负载数据			Overall Length 总长 L					
	Voltage 电压	Speed 转速	Current 电流	Speed 转速	Current 电流	Torque 转矩						
	VDC	rpm	mA(MAX)	rpm	mA(MAX)	gf.cm mN.m					mm	gf.cm
24mm-4速比	12.0	3774	191	3587	1525	659	64.6	72.1	20000	60000	4	19.1
24mm-6速比	12.0	2516	191	2391	1525	988	96.9		20000	60000	6	
24mm-16速比	12.0	944	196	897	1525	2213	217.0	78.0	20000	60000	16	25.0
24mm-24速比	12.0	629	196	598	1525	3319	325.5		20000	60000	24	
24mm-36速比	12.0	419	196	399	1525	4979	488.3		20000	60000	36	
24mm-64速比	12.0	236	196	224	1530	7435	729.1	85.0	20000	60000	64	32.0
24mm-96速比	12.0	157	196	149	1530	10196	999.9		20000	60000	96	
24mm-144速比	12.0	105	196	100	1530	16728	1640.6		20000	60000	144	
24mm-216速比	12.0	70	196	66	1530	25093	2460.8		20000	60000	216	
24mm-256速比	12.0	59	201	56	1530	24981	2449.9	92.0	20000	60000	256	39.0
24mm-384速比	12.0	39	201	37	1530	37472	3674.9		20000	60000	384	
24mm-576速比	12.0	26	201	25	1530	56208	5512.3		20000	60000	576	
24mm-864速比	12.0	17	201	17	1530	84312	8268.4		20000	60000	864	
24mm-1296速比	12.0	12	201	11	1530	126467	12403		20000	60000	1296	

* Above specifications are subject to change without notice, just for reference and customizable according to requirements

上规格数据仅供参考, 如有修改恕不另行通知, 可按需求定制

* 以

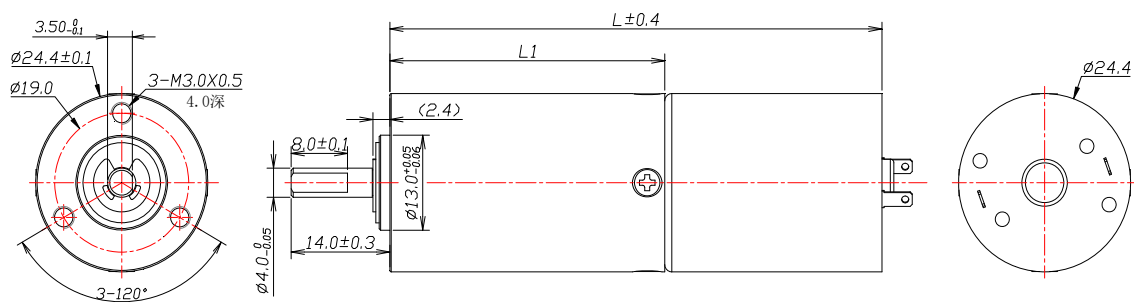

全金属齿轮箱 All Metal Gearbox